


Glazing design

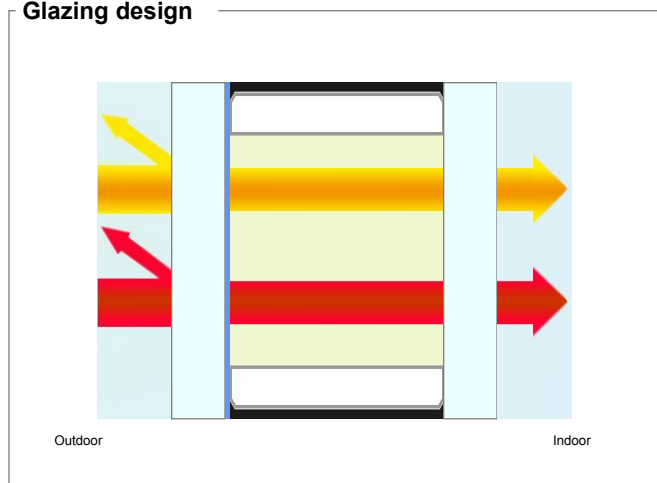

	First glazing	Second glazing
Gas		Argon 90% 16.00mm
Coating		
First glass	PLANICLEAR 4.00mm	PLANICLEAR 4.00mm
Coating	PLANISTAR EVO	
Layer		
Coating		
Second glass		
Coating		

Sound transmission loss

Rw(C;Ctr) = 31(-1;-4) dB

Acoustic values according to EN 12758 and from notified body

Burglar resistance EN356 : **NPD**

Manufacturing sizes

Nominal thickness : **24.0 mm**
Weight : **20.0 kg/m²**

Luminous factors (EN410-2011) : (D65 2°)

Transmittance : **61 %**
Outdoor reflectance : **23 %**
Indoor reflectance : **26 %**

Colour rendering :

Ra : **97 Transmittance**
Ra : **98 Outdoor reflectance**

Energy factors (EN410-2011) :

Transmittance : **37 %**
Outdoor reflectance : **39 %**
Indoor reflectance : **44 %**
Absorptance A1 : **23 %**
Absorptance A2 : **1 %**

Solar factors (EN410-2011) :

g : **0.39**
Shading coefficient : **0.45**

Thermal transmission (EN673-2011) - 0° related to vertical position

Ug : **1.0 W/(m².K)**